


CONTRACTOR IS RESPONSIBLE FOR PROVIDING THE SPREADER BAR AND LIFTING CABLES PER OSHA REQUIREMENTS

3/8" SLIP HOOK FOR A-ANCHORS (TYP)

PROPER LIFTING TECHNIQUE

MH SIZE	L	H	LBS/V.F.
48"	62"	21"	867
60"	76"	30"	1295
72"	90"	34"	1811
84"	104"	32"	2409
96"	120"	32"	3091
120"	146"	32"	4263

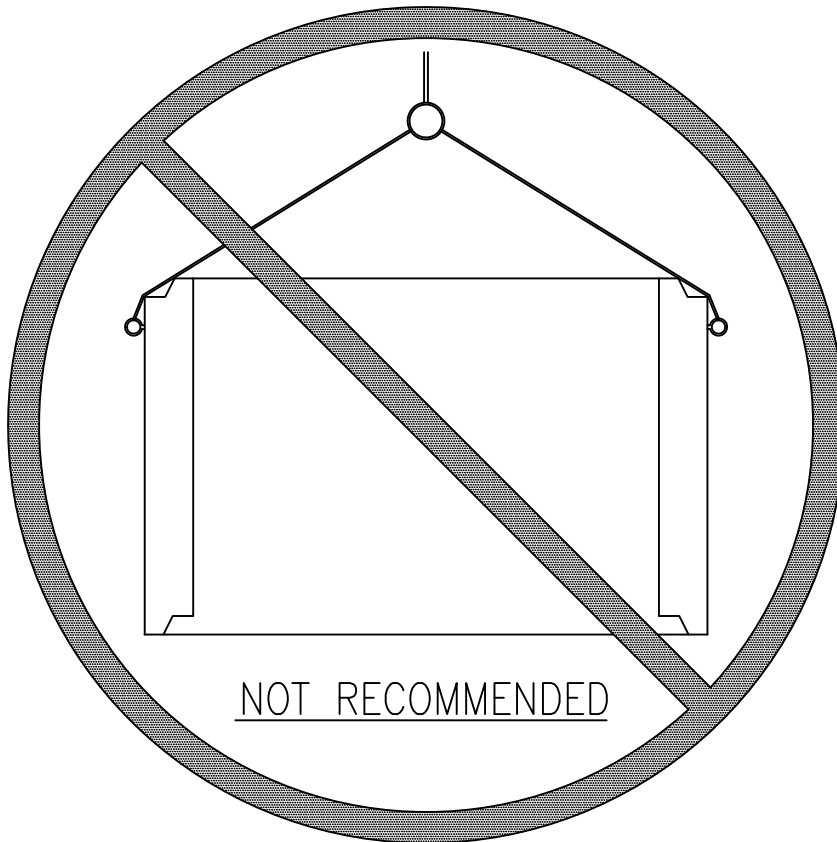

NOT RECOMMENDED



9235 Main Street #1
 P.O. Box 507
 Needville, Texas, 77461
 1-888-331-5871

"Providing Concrete Environmental Solutions"

RECOMMENDED LIFTING PROCEDURES

Date: 03 NOV 2012

File: NCP_LIFTING

Scale: 1"=1'-0"

* All Dimensions subject to allowable specification tolerances.

Approved By: _____

Date: _____